


# TITAN HOOKLOADER

Capacity 260 kN (-S) H =1420/1450 mm CH= 1050 mm

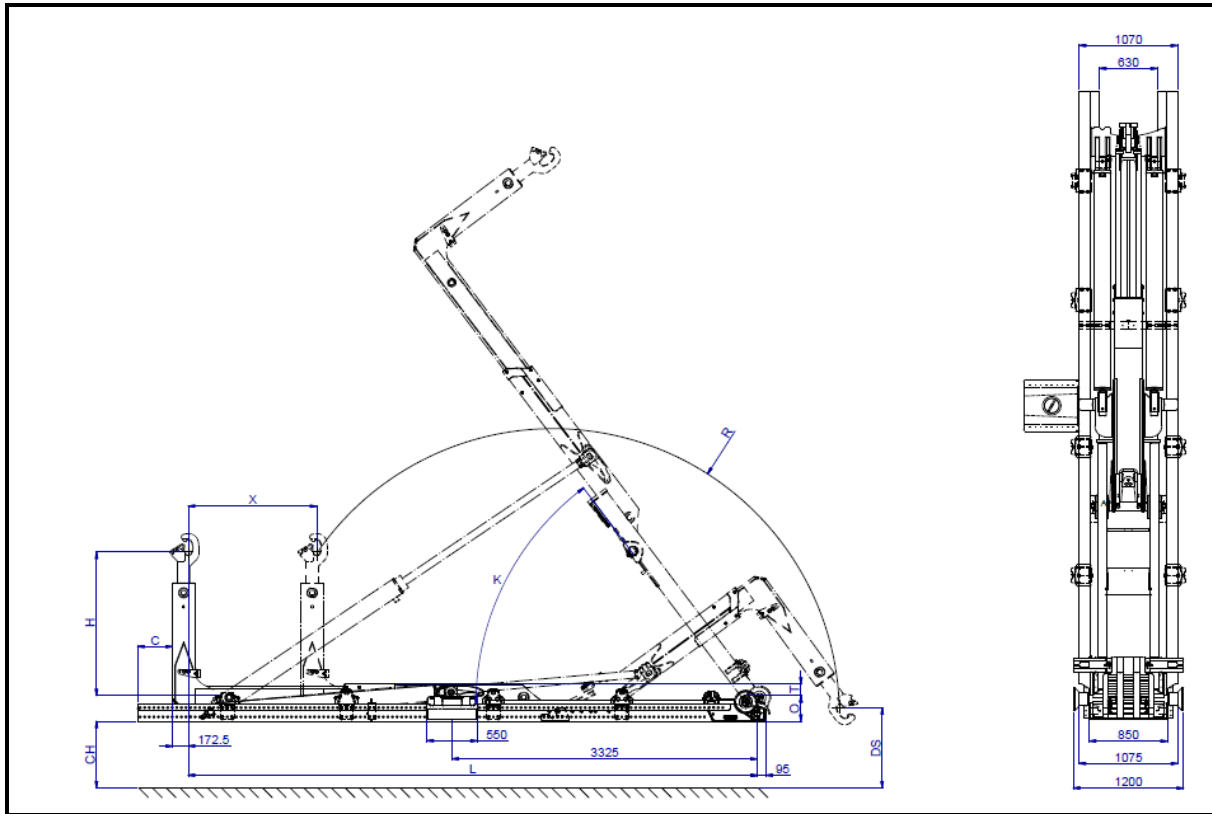

TYPE:	T26-47-S	T26-49-S	T26-51-S	T26-53-S	T26-55-S	T26-57-S	T26-60-S	T26-62-S	T26-65-S	T26-67-S
X (mm)	1000	1000	1000	1200	1200	1200	1400	1400	1400	1500
L (mm)	4700	4900	5100	5300	5500	5700	5950	6200	6450	6650
O (mm)	250	250	250	280	280	280	280	280	280	280
K	53°	49°	47°	54°	51°	48°	53°	50°	48°	48°
R (mm)	2795	2795	2795	2975	2975	2975	3095	3095	3180	3265
T (mm)	130	130	130	130	130	130	130	130	130	130
Weight <sup>1</sup> (kg)	2325	2350	2400	2800	2825	2850	2900	2925	3050	3075
DS (mm)	1290	1290	1290	1235	1235	1235	1130	1130	1185	1245
Min./max. container length (mm)	3700-5800	3900-6000	4050-6150	4100-6400	4300-6600	4500-6800	4550-7050	4800-7300	5050-7550	5150-7750
C (mm)	200	200	200	200	200	200	200	200	150	150
Loading (time) <sup>2</sup> (s)	34	34	34	40	40	40	45	45	45	46
Unloading (time) <sup>2</sup> (s)	41	41	41	48	48	48	54	54	54	55
Tipping (time) <sup>2</sup> (s)	37	37	37	44	44	44	49	49	49	49
Fast unloading (time) <sup>2</sup> (s)	13	13	13	15	15	15	17	17	17	17
Supplied Pump (l/min)	108	108	108	108	108	108	108	108	108	108
Flow (l/min)	120	120	120	120	120	120	120	120	120	120

H = Hook height, CH = Chassis height, DS = Lowest pick up point (depending on hook- and chassis height)

<sup>1</sup> Rough estimation based on a standard system, filled with oil and without mounting kit accessories.

<sup>2</sup> Rough estimation based on PTO type C, pump 120 l/min., motor 1200rpm, PTO transmission i = 1.0 and dependent on cylinder thickness.

Pressure: 350 bar